

MINI 12 EJ



www.ommelift.com

Trailer lift - Telescopic

Dealer:

ÅDALEN

A.Ådalen AB


Sverige
+46 73 303 99 39
post@aadalen.se
www.aadalen.se

OMMELIFT



Built to last - ask our users!

Mini 12 EJ Trailer lift

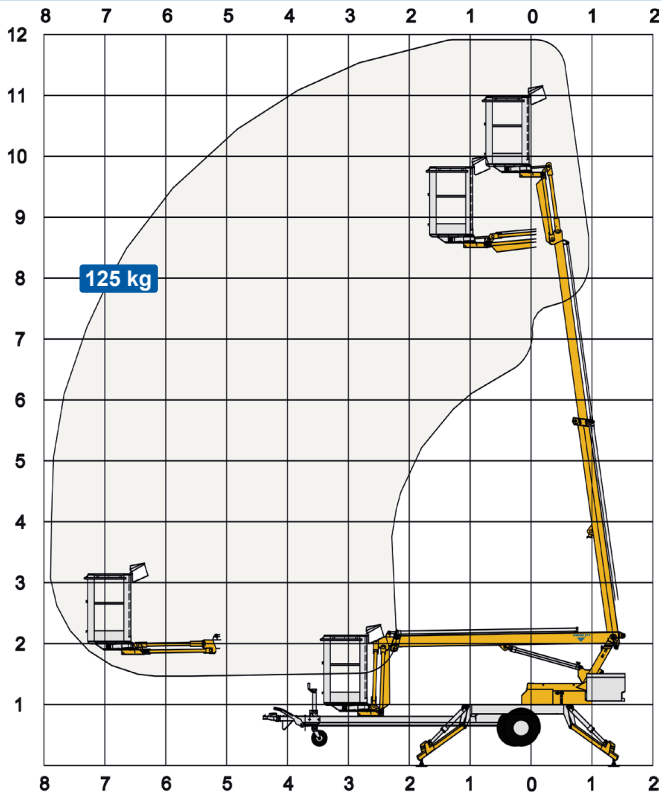

Technical Data:	Mini 12 EJ	Mini 12 EBJ
Max. working height	11.9 m	
Max. platform height	9.9 m	
Max. outreach	7.6 m	
Up and over clearance	-	
Angle boom length (boom + basket)	-	
Jib length (jib + basket)	2.0 m	
Vertical jib rotation	90°	
Turret rotation	± 355°	
Basket rotation	-	
Max. basket load	125 kg	
Basket size	0.85 x 0.7 x 1.1 m	
Stabilizer pad size	ø200 mm	
	230V / 10A	BATTERY
Engine		
Fuel tank capacity		
Generator		
Battery pack	24V/120Ah/5h	
Charger	24 V / 15 A	
Double charger system	Optional	
Elec. descent	Optional	Optional
See www.ommelift.com for more features and options		
Self-propulsion with hydraulic engagement of traction rollers **	Optional	
Gradeability	14% / 8° **	
Ground to tire clearance at max. set-up	Min. 340 mm (15.2% / 8.7°)	
Total weight	1260 kg	1260 kg
Ground pressure, outrigger pad	9.5 kg/cm ²	9.5 kg/cm ²
Ground pressure with 0.4 x 0.4 m spreader plate	0.5 kg/cm ²	0.5 kg/cm ²
Max. force, outrigger	8.1 kN	8.1 kN
Hydraulic stabilizers	Standard	
Controls	2-step	
Flush basket mount	Standard	
Elec. power outlet in basket	Standard	
Tool tray in basket	Standard	

